




Rec
Europäisch
Patentamt

10 14 DEC 2004
European
Patent Office

10/21/92/
PCT/IB 03/02832
13.06.03
Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

PCT/IB03/2832

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077448.5

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02077448.5
Demande no:

Anmeldetag:
Date of filing: 18.06.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Optical data storage medium and use of such medium

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Optical data storage medium and use of such medium

The invention relates to a multi-stack optical data storage medium for recording using a focused radiation beam entering through an entrance face of the medium during recording, comprising:

- a first substrate with present on a side thereof;
- 5 - a first recording stack named L_0 , comprising a recordable type L_0 recording layer, and formed in a first L_0 guide groove, and a first reflective layer present between the L_0 recording layer and the first substrate ,
- a second substrate with present on a side thereof;
- a second recording stack named L_1 comprising a recordable type L_1
- 10 recording layer, said second recording stack being present at a position closer to the entrance face than the L_0 recording stack and formed in a second L_1 guide groove,
- a transparent spacer layer sandwiched between the recording stacks, said transparent spacer layer having a thickness substantially larger than the depth of focus of the focused radiation beam.
- 15 The invention also relates to the use of such a medium.

An embodiment of an optical recording medium as described in the opening paragraph is known from European Patent Application EP1067535A2. Normally the medium

20 is in the form of a circular disk.

Regarding the market for optical recording, it is clear that the most important and successful format so far is a write-once format, CD-R. Although the take-over in importance by CD-RW has been predicted since a long time, the actual market size of CD-R media is still at least an order of magnitude larger than for CD-RW. Furthermore the most

25 important parameter for drives is the maximum write speed for R-media, not for RW. Of course, a possible shift of the market to CD-RW is still possible, e.g. because of Mount Rainier for CD-RW. However, the R-format has been proven very attractive due to its 100% compatibility.

Next to the DVD+RW standard recently a new DVD+R standard was developed. The new DVD+R standard gets increasing attention as an important support for DVD+RW. A possible scenario is that the end customers have become so familiar with an optical write-once format that they might accept it more easily than a re-writable format.

5 An issue for both the R and RW formats is the limited capacity and therefore recording time because only single-stacked media are present (for DVD-Video, dual stacked media have a considerable market share). A dual-layer DVD+RW disk is probably feasible. However, it has become clear that a fully compatible disk, i.e. within the reflection and modulation specification of the dual-layer DVD-ROM, is very difficult to achieve and
10 requires at least a major breakthrough for the phase-change material properties. Without a full compatibility, the success of a dual-layer DVD+RW in the market is questionable.

In order to obtain a dual-layer DVD+R medium which is compatible with the dual-layer DVD-ROM standard, the effective reflectivity of both the upper L_1 layer and the lower L_0 layer should be at least 18%. Effective means that the reflection is measured as the
15 portion of effective light coming back from the medium when both stacks L_0 and L_1 are present and focusing on L_0 and L_1 respectively. This means that the L_0 stack as such requires a far higher reflection level of e.g. more than 50%, preferably more than 60%, because the L_1 stack absorbs a substantial portion of the incoming and outgoing light. It should be noted that in this document the normally used convention of notation of L_0 and L_1 , in which notation L_0
20 is the "closest" stack, i.e. closest to the radiation beam entrance face, has been changed: L_0 now is the deepest stack and $L_1 \dots L_n$ are stacks closer to the radiation beam entrance face. In EP1067535A2 the following definitions are used: DG1 is the thickness of the dye layer in groove of the first information recording/reproduction unit which corresponds to L_1 , dG2 is the thickness of the dye layer in groove of the second information recording/reproduction
25 unit which corresponds to L_0 . DL1 is the thickness of the dye layer on land corresponding to L_1 , dL2 is the thickness of the dye layer on land corresponding to L_0 . The depth of the grooves corresponding to L_1 is d1 but the depth of the grooves d2 corresponding to L_0 is defined differently. D2 is the height difference of lands and grooves measured on the dye surface after a dye layer has been coated. DG2, d2 and dL2 are set to approximately 174, 140
30 and 120 nm. A calculation shows that this corresponds to a groove depth g in the substrate corresponding to L_0 of about 194 nm. Measurements by applicants have shown that the inverted L_0 stack of the known medium with grooves with a depth of 194 nm has a reflectivity being only 15% - 50% of the reflectivity of blank areas (i.e. without grooves). This means that it is impossible to reach the desired 60% reflection level because in order to

obtain a dual-layer DVD+R medium which is compatible with the dual-layer DVD-ROM standard, the reflectivity of a light beam focused onto the data track of the lower L_0 layer should be sufficiently high (typically $> 60\%$, depending on the transmission of the upper L_1 layer). From a dual-layer DVD+R production point of view, an inverted L_0 layer structure is preferred which means that the recording layer of the L_0 stack is present at a side of the reflective layer other than the side of the substrate with groove structure.

It is an object of the invention to provide an optical data storage medium of the type mentioned in the opening paragraph which has a reflection value of the L_0 recording stack higher than 25%.

This object has been achieved in accordance with the invention by an optical storage medium as described in the opening paragraph, which is characterized in that the first L_0 guide groove has a depth $G_{L0} < 100$ nm. This invention disclosure proposes the use of shallow grooves in order to achieve a high reflection value. According to calculations grooves deeper than 200 nm may also achieve a high reflection but are more difficult to manufacture from the point of view of mastering and injection moulding. The explanation for the reduced reflection above 100 nm may be that grooves covered with metal act as a waveguide for the radiation beam, thereby lowering the effective reflectivity due to optical effects. At depths > 200 nm these effects may again lead to an increase of the reflection.

In an embodiment $G_{L0} < 80$ nm and the first L_0 guide groove has a full half maximum width $W_{L0} < 350$ nm. For grooves which have a width of smaller than 350 nm the groove depth should be smaller than 80 nm. When grooves are relatively wide, e.g. 500-600 nm, groove depths of close to 100 nm may be feasible with still enough reflection. At smaller groove widths wave guide like effects play a more prominent role and the effective reflectivity may decrease. The shallow groove depth will result in inversion of the radial-error signal (push pull) and of the wobble signal. This should be corrected for in the drive.

In another embodiment $30 \text{ nm} < G_{L0} < 40$ nm and the first reflective layer comprises a metal and has a thickness > 50 nm. A very high reflection value is obtained by which compatibility with the DVD-dual layer read only, i.e. video and ROM, standard is achieved. Without additional measures the reduced groove depth seems to have a relatively low optical modulation, i.e. optical contrast between mark and non-mark. For e.g. a 35 nm deep groove experiments showed a modulation of 10 %, both on land and groove.

In a further embodiment recordable type L_0 recording layer comprises a dye

and has a thickness between 100 nm and 150 nm measured on the land portion of the guide groove. When using this thickness range adequate mark formation in the dye layer is achieved. When using this stack good modulation is possible combined with the strongly reduced groove depth. As the recording is performed on land, as opposed to in-groove, a proper sign of the modulation, i.e. high to low recording, is achieved. This has the additional advantage that the push-pull signal has the proper sign and no measures in the optical disk drive are required to invert the push-pull sign.

A dielectric layer may be present at a side of the L_0 recording layer opposite from the side where the first reflective layer is present. This has the advantage of even a better modulation. The dielectric layer preferably has a thickness in the range of 5 nm – 120 nm.

In yet another embodiment a second reflective layer comprising a metal is present at a side of the L_0 recording layer opposite from the side where the first reflective layer is present. Preferably the second reflective layer has a thickness in the range of 5 nm – 15 nm. The second reflective layer preferably mainly comprises a metal selected from the group of Ag, Au, Cu, Al. The second reflective layer has the advantage of an even higher reflection of the L_0 stack. Small variations in stack design may be required to reach good recording performance.

An additional advantage of the use of shallow grooves in an inverted L_0 stack is that a wobble of the guide groove is less visible in the reflection of the radiation beam. A wobble is used to modulate additional information in the guide groove, e.g. an address or time signal. When e.g. using a guide groove with a depth G_{L0} of 160 nm a variation of 15 % is visible in the signal with the same periodicity as the wobble. At a groove depth G_{L0} of 35 nm this variation is substantially absent.

The invention will be elucidated in greater detail with reference to the accompanying drawings, in which

Figure 1 shows the reflectivity on a blank area (mirror) and grooved area for an inverted L_0 DVD+R stack. The groove depth is 126 nm. The reflectivity on the grooved area is only about 15% of the reflectivity on the blank area,

Figure 2 shows the reflectivity on a blank area (mirror) and grooved area for an inverted L_0 DVD+R stack. The groove depth is 35 nm. The reflectivity on the grooved area is approximately 85% of the reflectivity on the blank area,

Figure 3 schematically shows a cross-section of an embodiment according to the invention,

Figure 4 schematically shows a cross-section of an embodiment according to the invention for an inverted L_0 stack,

5 Figures 5a and 5b show the calculated result of a modeling study of a stack design according to the invention,

Figures 6a and 6b show the calculated result of a modeling study of another stack design according to the invention,

10 Figure 7 Reflection and modulation calculated for a reference disk: single-layer DVD+R.

In Fig.1 the results of experiments on inverted L_0 DVD+R stacks are presented when a substrate with a groove depth G_{L0} of 126 nm, not according to the invention, was used. The reflectivity on the grooved area is approximately 15% of the reflectivity on the blank area (mirror). This value is not acceptable.

15 In Fig.2 the results of experiments on inverted L_0 DVD+R stacks are shown. A DVD+RW substrates with a groove depth of about 35 nm, according to the invention, was used. The reflectivity on the grooved area is approximately 85% of the reflectivity on the blank area, which significantly higher than for deeper grooves. The disks still shows sufficient push-pull signal, so tracking is possible. Also the experiments show that it is possible to write data, although the modulation appears to be relatively low (10 %, 11T-carrier to noise ratio CNR ~ 30 dB) but with the stack design of Fig. 5 and Fig. 6 a high modulation is possible.

25 The L_0 substrate 31a had 35 nm deep grooves with a FWHM width W_{L0} of 300 nm, a reflective layer 39 of 100 nm Ag, and 80 nm azo dye recording layer 35, and a protective layer. Typical dyes that can be used are (phthalocyanine)-type, azo-type, squarylium-type, pyrromethene-type or other organic dye material having the desired properties.

30 In Fig. 3 a multi-stack optical data storage medium 30 for recording is shown. A focused radiation beam i.e. a laser beam 40 enters through an entrance face 41 of the medium 30 during recording. The medium comprises a first substrate 31a with present on a side thereof a first recording stack 33 named L_0 , comprising a recordable type L_0 recording layer 35, i.e. an azo dye. The L_0 recording layer is formed in a first L_0 guide groove 38a, and

a first reflective layer 39 is present between the L_0 recording layer 35 and the first substrate 31a. A second substrate 31b is present with on a side thereof a second recording stack 32 named L_1 comprising a recordable azo dye type L_1 recording layer 34. The second recording stack L_1 32 is present at a position closer to the entrance face than the L_0 recording stack 41 and formed in a second L_1 guide groove 37.

A transparent spacer layer 36 is sandwiched between the recording stacks 32, 33 and has a thickness of approximately 40 μm . The first L_0 guide groove 38a has a depth of 35 nm. Note that the depth of the guide groove is defined at the position of the semi reflective layer present between 34 and 36. The medium may be manufactured as follows. The spacer 36 either contains the first guide groove, also called pregroove, for L_0 or this first guide groove for L_0 is mastered into the spacer after application of it to L_1 . Normally the guide groove constitutes a spiral. Then the first recording stack L_0 is deposited on the grooved spacer 36. Finally, the first substrate 31a, containing no grooves, is applied. This lay-out is called type 1.

In Fig.4 a variant of the medium 30 is shown called type 2. The description of Fig. 3 applies with the exception that a guide groove 38b now is present in the first substrate 31a. This first substrate 31a with L_0 is attached to the substrate with L_1 with the transparent spacer layer 36 in between. Specific suitable L_0 stack designs named stack 1 and stack 2 are discussed elsewhere in this document with the description of Fig. 6 and Fig.7. The preferred spacer-layer thickness for both disk types is 40 μm to 70 μm . One specific embodiment would be:

L_1 : 80 nm dye/ 12 nm Ag/ UV curable resin (protective layer) and

L_0 : 100 nm (ZnS)80(SiO₂)20 / 130 nm dye/ 100 nm Ag, and a spacer thickness of 55 μm . The effective reflection from L_1 is 20 %, effective reflection (measured through L_1) from L_0 is 21%.

The upper L_1 stack of a recordable dual-stack DVD disk should have high transparency in order to be able to address the lower lying L_0 stack. At the same time, L_1 preferably should have a reflectivity of at least 18% in order to meet the dual layer DVD-ROM specification. The stacks proposed here are not restricted to use in DVD+R-DL and can be applied in any (multi-stack) organic-dye based optical recording medium.

In Figs.5a and 5b modeling results are presented on a stack with the following design:

Stack 1:

- 35 nm deep guide grooves in substrate 31a,

- an optically closed Ag mirror of 100 nm. Other metals, e.g. Au, Cu or Al, may be used as well,
- an azo dye layer, with thickness of 130 nm on land, the refractive index of the dye is $2.24 - 0.02i$ which corresponds to a typical dye,
- 5 - 80 to 120 nm $(\text{ZnS})_{80}(\text{SiO}_2)_{20}$, other dielectrics with $n \sim 2.1$ give identical results.

This design combines a high reflectivity and a high modulation of the inverted L_0 recording stack for the case of shallow grooves. The stacks should be recorded on-land (as opposed to in-groove) in order to obtain the proper sign of the modulation (high-to-low recording). This has as an additional advantage that the push-pull signal has the proper sign

10 ("on-land"). The parameter L is defined as: $L = (d_G - d_L)/G$ in which formula d_G is the dye thickness in the groove, d_L is the dye thickness on land and G is the groove depth. This parameter is a measure for the leveling out of the dye after depositing on the groove structure. Normally, dye is deposited by spincoating and typically the leveling is between about 0.2 and 0.5. $L = 0$ means that $d_G = d_L$ and $L = 1$ means that the top surface of the dye is

15 completely flat after depositing on the guide groove structure. In Fig 5a the calculated results of the on-land reflection as a function of the on land dye thickness d_L are shown. In Fig. 5b the calculated results of on land modulation as a function of the on land dye thickness d_L are shown. The horizontal dotted line indicates a minimum desired level. It can be noted that the desired level is reached at dye thickness range of about 100-130 nm.

20 Experimental results obtained with this stack 1 are: A high modulation of 75% and a high reflection level of 70%. Modulation is generally defined as $(R_{\text{mark}} - R_{\text{no-mark}}) / R_{\text{no-mark}}$ in which formula R_{mark} and $R_{\text{no-mark}}$ are the reflection levels from the read out laser beam when respectively a written mark and no mark is present. The laser beam power required to write in the L_0 layer is only 7 mW, which is favorable in view of the presence of the L_1 stack

25 because a relatively large portion of the power will be absorbed in the L_1 stack.

In Fig.6 modeling results are presented on a stack with the following design:

Stack 2:

- 30 to 40 nm deep guide grooves in substrate 1a,
- an optically closed Ag reflective layer 39 of 100nm, other metals, e.g. Au, Cu or Al, may be
- 30 used as well,
- an azo dye layer, thickness 100 to 130 nm on land, the refractive index of the dye is $2.24 - 0.02i$ which corresponds to a typical dye,
- a 5 to 15 nm second reflective layer of Ag, other metals, e.g. Au, Cu or Al, may be used as well,

A third stack design is possible which is not shown in a drawing but is described here:

Stack 3:

- 30 to 40 nm deep guide grooves in substrate 1a,
- 5 - an optically closed Ag reflective layer 39 of 100nm, other metals, e.g. Au, Cu or Al, may be used as well,
- an azo dye layer 35, thickness 90 nm to 160 nm on land, the refractive index of the dye is $2.24 - 0.02i$ which corresponds to a typical dye,
- a 5 to 50 nm layer of SiO_2 , other dielectrics may be used as well.

10 The advantage of this third stack design is that it is more easy to manufacture compared to the second stack design.

In Fig.7, as an example, the result for a conventional single stack DVD+R disk is shown. The refractive index of the dye is taken as $2.24 - 0.02i$ (this corresponds to a typical dye). According to the calculations, around a thickness of 80 to 90 nm of dye, both
15 the on-groove reflection curve 72 and the on-groove modulation curve 71 are at optimum values. The calculated reflectivity and modulation agree well with experimentally obtained values. To achieve good signal quality from the L_0 layer, it was attempted to obtain stack designs that combine high reflectivity with a high modulation (both > 60 %). It turns out that
20 for a straightforward three-layer stack-design, in-groove recorded signals have the wrong polarity (low-to-high recording, not shown) in most cases. Thus for the case of shallow grooves, on-land recording may be considered, or more complicated stack designs. For both stack designs of Fig. 5 and Fig.6 mentioned above, a dye thickness-range can be identified where both modulation and reflection are high. Note that the stacks proposed here, are optimized for shallow grooves.

25 It should be noted that the above-mentioned embodiment illustrates rather than limits the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed
30 in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

According to the invention a multi-stack optical data storage medium for recording using a focused radiation beam entering through an entrance face of the medium. It has a first substrate with present on a side thereof a first recording stack (33) named L_0 formed in a first L_0 guide groove. A first reflective layer is present between the first
5 recording stack L_0 and the first substrate. A second substrate has present on a side thereof a second recording stack named L_1 , being present at a position closer to the entrance face than the L_0 recording stack and formed in a second L_1 guide groove. A transparent spacer layer is sandwiched between the recording stacks. The first L_0 guide groove has a depth $G_{L_0} < 100$ nm. In this way a relatively high reflection value of the L_0 stack is achieved.

CLAIMS:

1. A multi-stack optical data storage medium for recording using a focused radiation beam entering through an entrance face of the medium during recording, comprising:

- a first substrate with present on a side thereof:

5 - a first recording stack named L_0 , comprising a recordable type L_0 recording layer, and formed in a first L_0 guide groove, and a first reflective layer present between the L_0 recording layer and the first substrate,

- a second substrate with present on a side thereof:

10 - a second recording stack named L_1 comprising a recordable type L_1 recording layer, said second recording stack being present at a position closer to the entrance face than the L_0 recording stack and formed in a second L_1 guide groove,

- a transparent spacer layer sandwiched between the recording stacks, said transparent spacer layer having a thickness substantially larger than the depth of focus of the focused radiation beam,

15 characterized in that the first L_0 guide groove has a depth $G_{L0} < 100$ nm.

2. A multi-stack optical data storage medium according to claim 1, wherein $G_{L0} < 80$ nm and the first L_0 guide groove has a full half maximum width $W_{L0} < 350$ nm.

20 3. A multi-stack optical data storage medium according to claim 1, wherein 30 nm $< G_{L0} < 40$ nm and the first reflective layer comprises a metal and has a thickness > 50 nm.

25 4. A multi-stack optical data storage medium according to claim 3, wherein the recordable type L_0 recording layer comprises a dye and has a thickness between 100 nm and 150 nm measured on the land portion of the guide groove.

5. A multi-stack optical data storage medium according to claim 4, wherein a dielectric layer is present at a side of the L_0 recording layer opposite from the side where the

first reflective layer is present.

6. A multi-stack optical data storage medium according to claim 5, wherein the dielectric layer has a thickness in the range of 5 nm – 120 nm.

5

7. A multi-stack optical data storage medium according to claim 4, wherein a second reflective layer comprising a metal is present at a side of the L_0 recording layer opposite from the side where the first reflective layer is present.

10 8. A multi-stack optical data storage medium according to claim 5, wherein the second reflective layer has a thickness in the range of 5 nm -15 nm.

9. A multi-stack optical data storage medium according to claim 5 or 6, wherein the second reflective layer mainly comprises a metal selected from the group of Ag, Au, Cu, Al.

15

10. Use of an optical data storage medium as claimed in any one of the preceding claims for multi stack recording with a reflectivity level of the first recording stack L_0 as such of more than 50% and modulation of recorded marks in the L_0 recording layer of more than 60%.

20

ABSTRACT:

A multi-stack optical data storage medium (30) for recording using a focused radiation beam (40) entering through an entrance face (41) of the medium (30). It has a first substrate (31a) with present on a side thereof a first recording stack (33) named L_0 formed in a first L_0 guide groove (38a, 38b). A first reflective layer (39) is present between the first
5 recording stack (33) L_0 and the first substrate (31a). A second substrate (31b) has present on a side thereof a second recording stack (32) named L_1 , being present at a position closer to the entrance face than the L_0 recording stack (41) and formed in a second L_1 guide groove (37). A transparent spacer layer (36) is sandwiched between the recording stacks (32, 33). The first L_0 guide groove (38b) has a depth $G_{L_0} < 100$ nm. In this way a relatively high
10 reflection value of the L_0 stack is achieved.

Fig. 4

PHNL020577

1/5

BEST AVAILABLE COPY

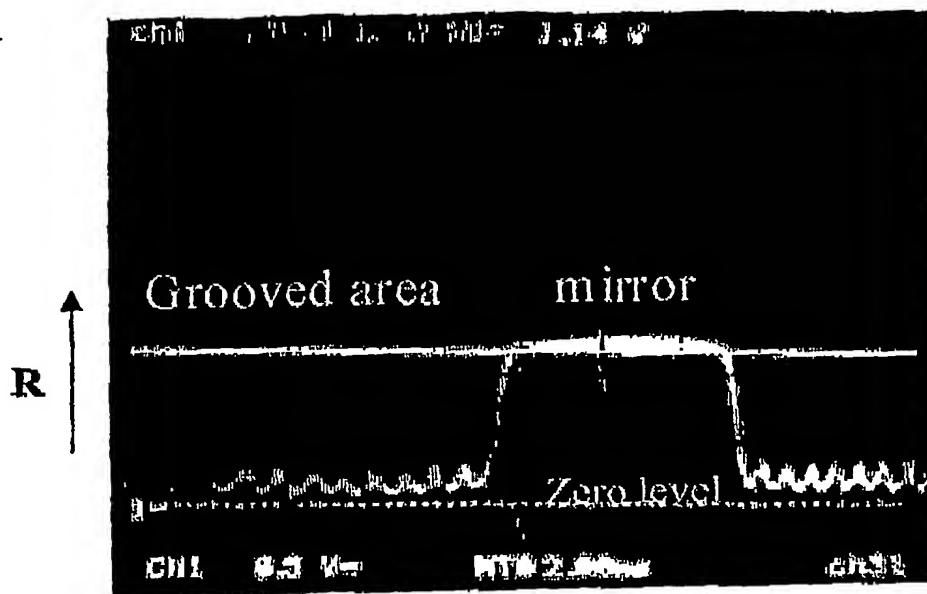


FIG.1

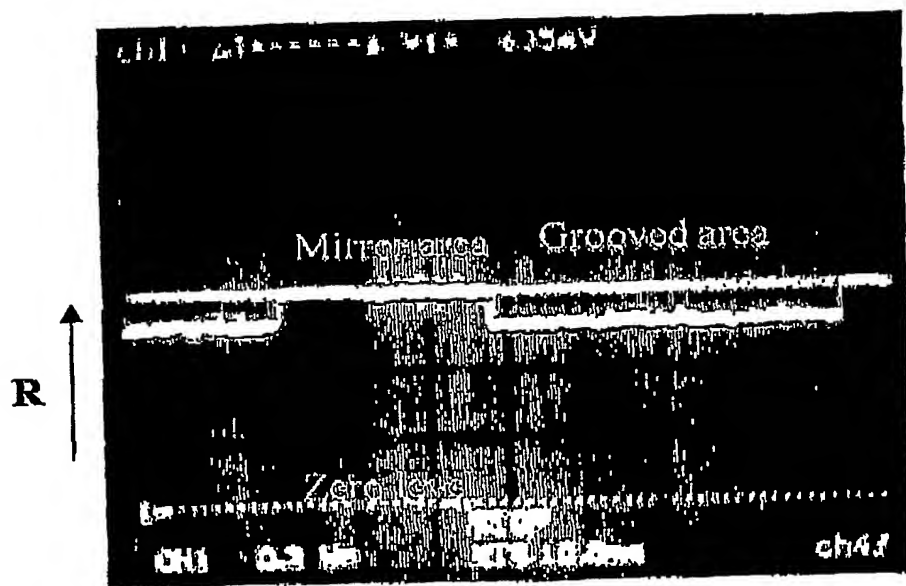


FIG.2

PHNL020573

2/5

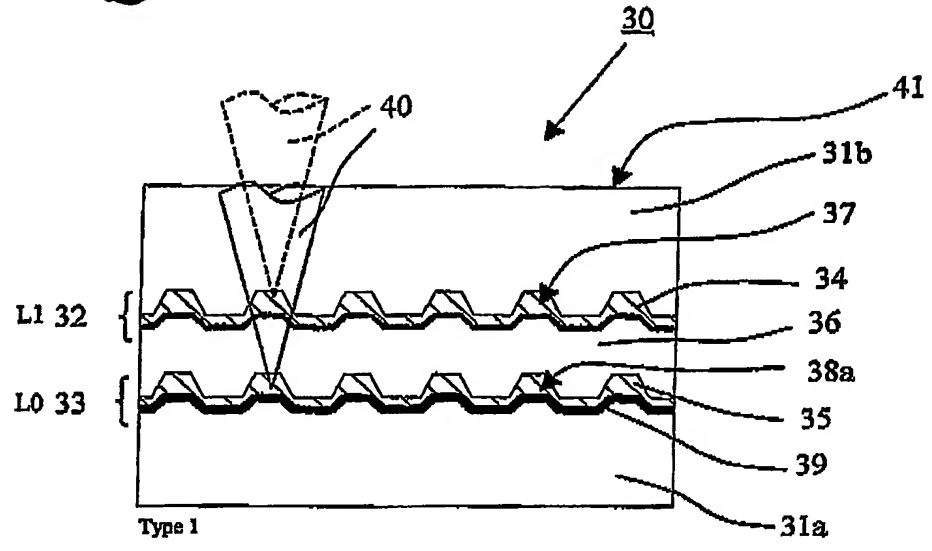


FIG.3

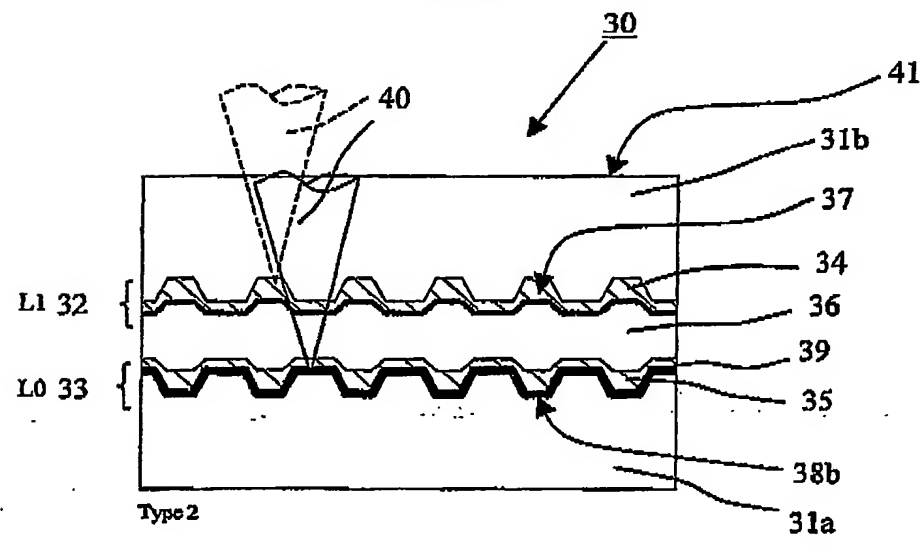


FIG.4

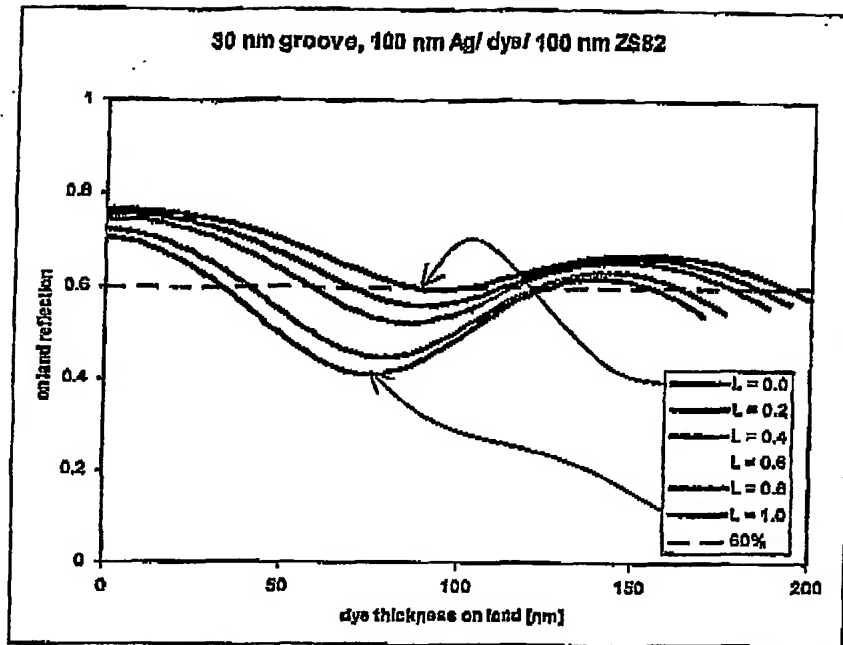


FIG. 5a

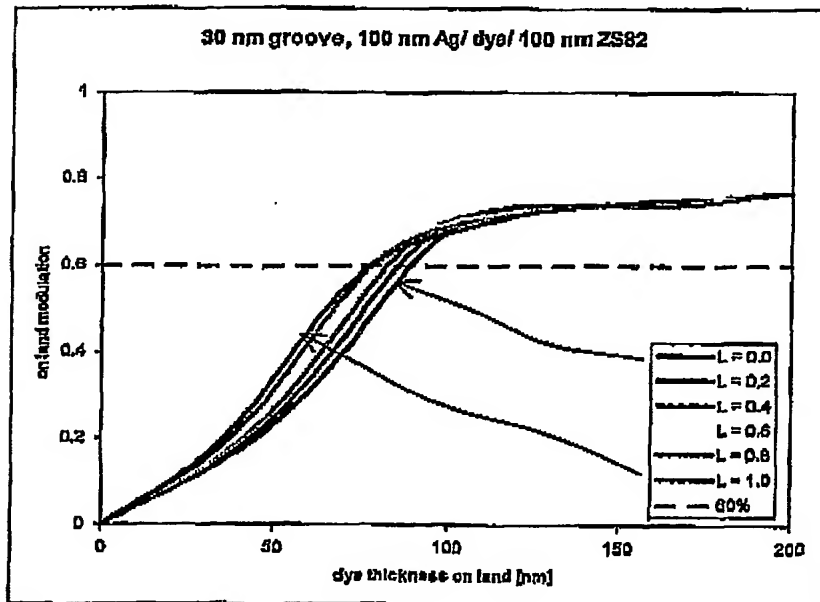


FIG. 5b

4/5

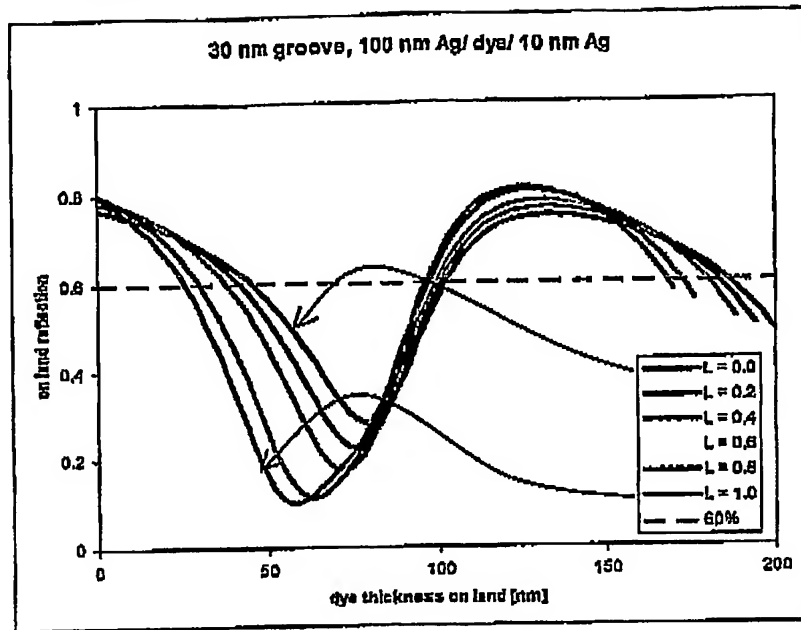


FIG. 6a

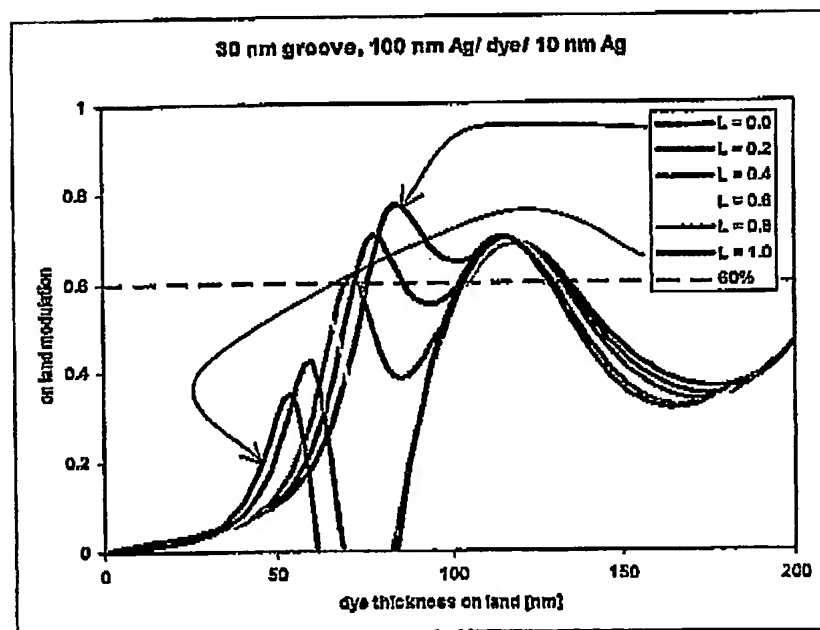


FIG. 6b

5/5

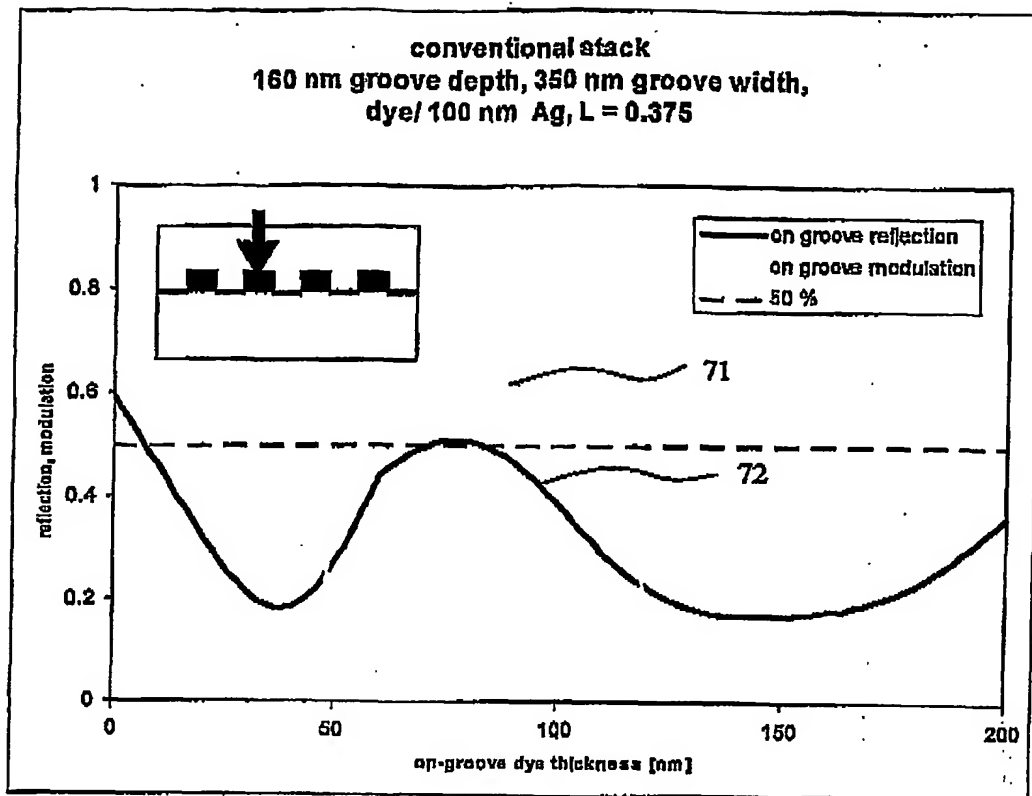


FIG.7